




SUPPORT WALL DETAIL

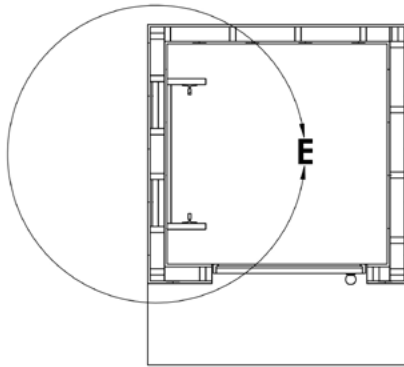

IF SUPPORT WALL IS BLOCK,
BACK FILL ALL CELLS SOLID
FROM TOP TO BOTTOM AT RAIL
STACK LOCATION

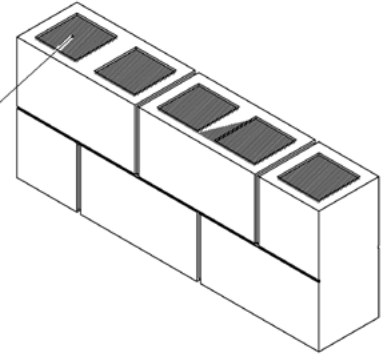


INTERIOR HOISTWAY
WALL TO BE SHEETED
WITH 1/2" PLYWOOD

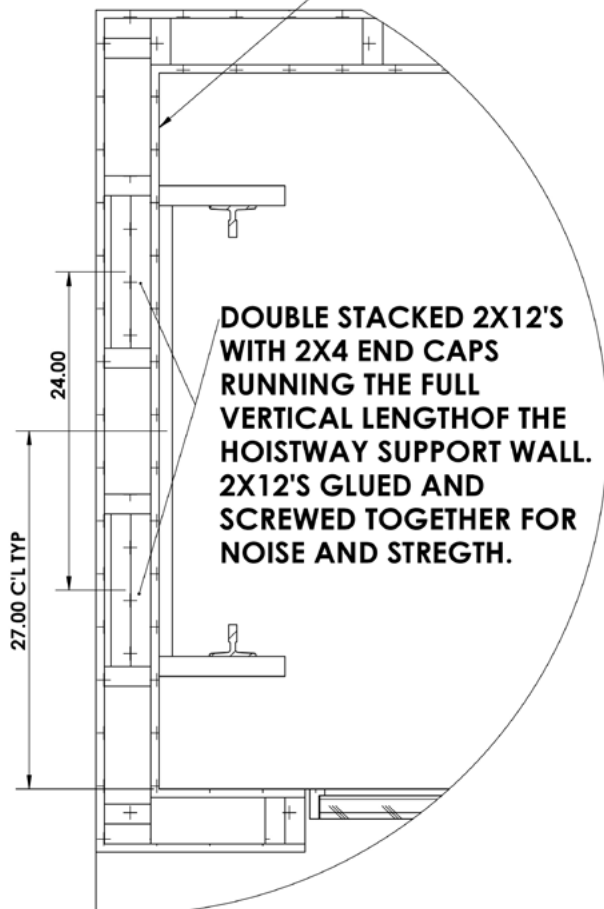

DOUBLE STACKED 2X12'S
WITH 2X4 END CAPS
RUNNING THE FULL
VERTICAL LENGTH OF THE
HOISTWAY SUPPORT WALL.
2X12'S GLUED AND
SCREWED TOGETHER FOR
NOISE AND STRENGTH.

ATTACH RAIL BRACKET
VIA MIN 3/8 X 3 1/4
LAG FOR WOOD OR
MIN 3/8 X X 3 1/2
WEDGE ANCHOR FOR
CONCRETE

(4) TOTAL/BRACKET

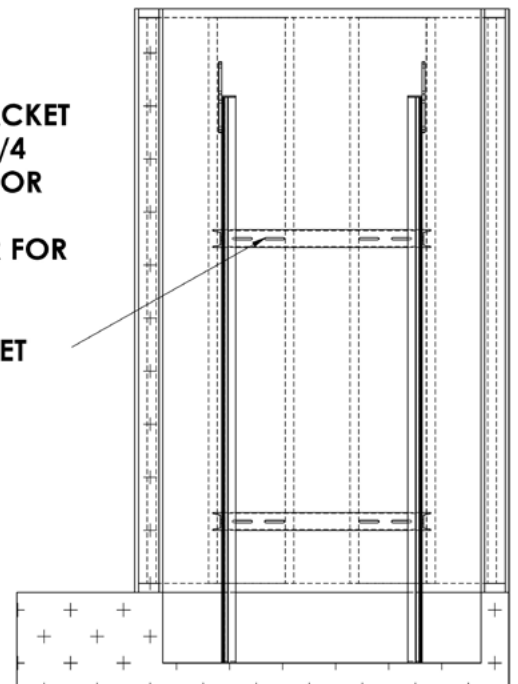

DETAIL E