


**NEW Integrated Disconnect
Elevator Controller**

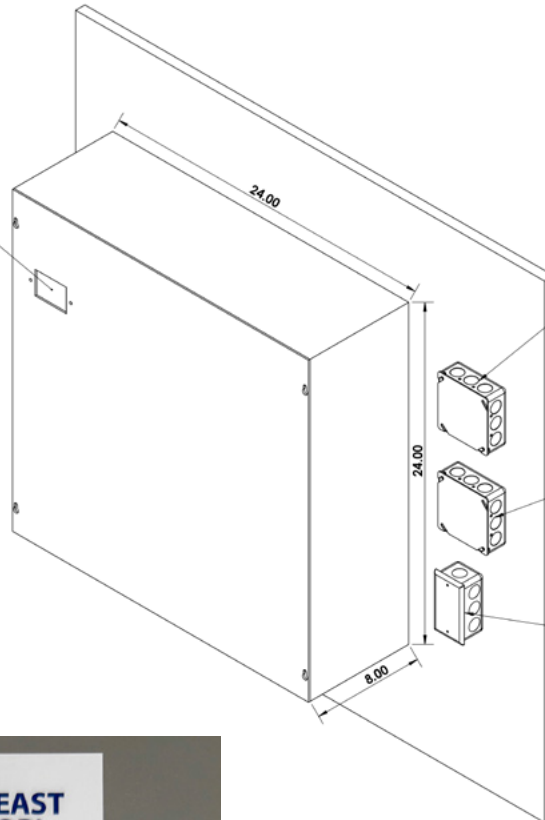

**BY OTHERS: 240vac 30amp
dedicated service w/
neutral must be provided
at a junction box adjacent
to the equipment location.
(10-3 Conductor)**

**BY OTHERS: 120vac 15amp
dedicated service must be
provided at a junction box
adjacent to the equipment
location.
(12-2 Conductor)**

**BY OTHERS: Live analog
phone signal at a junction
box or MyLinkLine Cellular
modem required prior to
leaving elevator operational.**

